

ZERO•NET™ FM2500 PRESSURE CURTAIN WALL


PRODUCT DESCRIPTION

The **FM2500 series**, our standard [pressure wall systems](#), have been a staple in building construction since 1996, during the FM Enterprise era. The FM2500 series is a conventional thermally broken pressure bar system.

PRODUCT FEATURES


- Low to mid-rise application
- Field or shop (fabricated ladders) glazed
- System depth - 6 1/4" to 10 1/4"
- 2 1/2" mullion sightlines (can accommodate custom sizes)
- Can accommodate infills up to 1 3/4" for greater thermal performance
- Furnished in captured or SSG
- Exterior sunshades and interior light shelves are available
- System performance is driven by glass

For additional information (CAD details, specifications, test reports, thermal simulations) visit our website at: www.fremarqinnovations.com

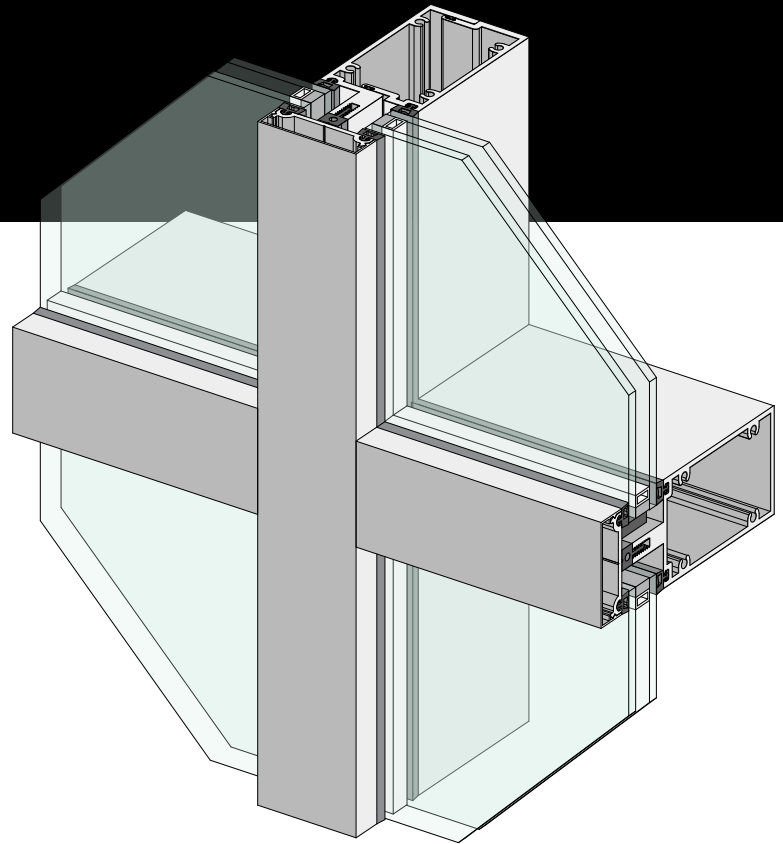

RELATED PROJECT

Think Bank
Rochester, NY
HGA

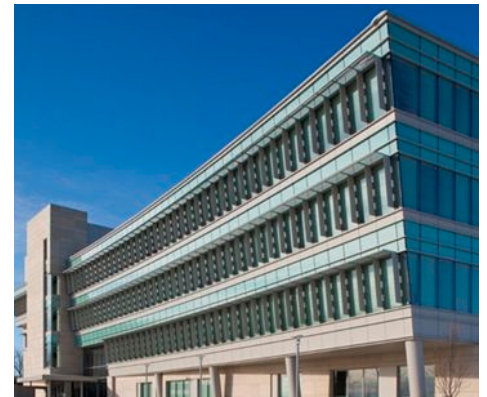

THERMAL PERFORMANCE

	U-Factor Center of Glass (Btu/h-ft ² -F)	U-Factor Assembled (Btu/h-ft ² -F)	SHGC	VT	CR
2507 4-sided Cap.	0.241	0.387	0.355	0.629	59

Covered by one or more of the following US or Foreign Patents No. 9,212,482; 9,663,946; 11,214,961; 11,434,635 Canada 2,951,502; Canada 2,950,781; EU EP3314065 and other US and foreign patents pending. The End of Compromise® is a registered trademark and FreMarq™, FortMax™, and Zero•Net™ are protected trademarks of FreMarq Innovations, Inc. ©2018-2025 FreMarq Innovations, Inc.



FreMarq
INNOVATIONS

(715) 842-6842

WWW.FREMARQINNOVATIONS.COM

