

ZERO•NET™

US8375


UNITIZED CURTAIN WALL

PRODUCT DESCRIPTION

The **US8375**, our standard **unitized curtain wall** system, has been a staple in building construction since 1996, during the FM Enterprise era. This system is a conventional thermally broken unitized curtain wall system.

PRODUCT FEATURES

- Mid to high-rise application
- Shop glazed
- System depth - 7 3/8" to 8 3/8"
- 2 1/2" or 3" mullion sightlines (can accommodate custom sizes)
- Can accommodate infills up to 1 3/4" for greater thermal performance
- Furnished in captured or SSG
- Exterior sunshades and interior light shelves are available
- System performance is driven by glass

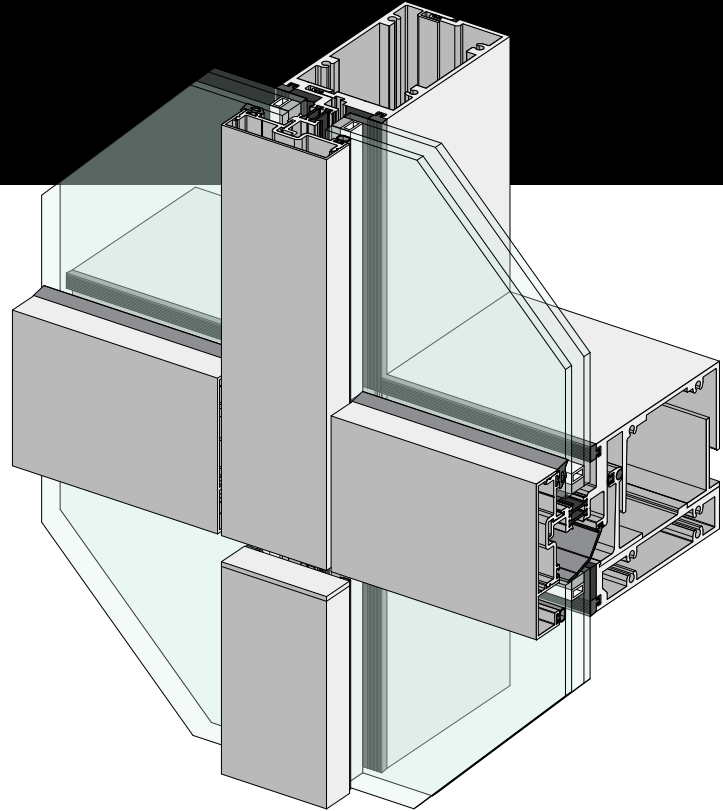

RELATED PROJECT

Kean University
Union, NJ
Gruskin Group



THERMAL PERFORMANCE

CAPTURED

U-Factor Center of Glass (Btu/h-ft ² -F)	U-Factor Assembled (Btu/h-ft ² -F)	SHGC	VT	CR
0.244	0.315	0.202	0.394	68.7
SSG				
U-Factor Center of Glass (Btu/h-ft ² -F)	U-Factor Assembled (Btu/h-ft ² -F)	SHGC	VT	CR
0.243	0.337	0.342	0.616	65

Covered by one or more of the following US or Foreign Patents
No. 9,212,482; 9,663,946; 11,214,961; 11,434,635 Canada
2,951,502; Canada 2,950,781; EU EP3314065 and other US and
foreign patents pending. The End of Compromise® is a
registered trademark and FreMarq™, FortMax™, and Zero•Net™
are protected trademarks of FreMarq Innovations, Inc. ©2018-
2025 FreMarq Innovations, Inc.

For additional information (CAD details,
specifications, test reports, thermal simulations) visit
our website at: www.fremarqinnovations.com



FreMarq
INNOVATIONS

(715) 842-6842

WWW.FREMARQINNOVATIONS.COM

